




ROMOLD DN1000 PP Pre-Benched Bases - Stock - DN150 inlet and outlet
All sockets have $\pm 3.75^{\circ}$ angular tolerance, $\pm 6.5\%$ grade tolerance
Inlet configurations outside of this range can be fabricated by AML in New Zealand



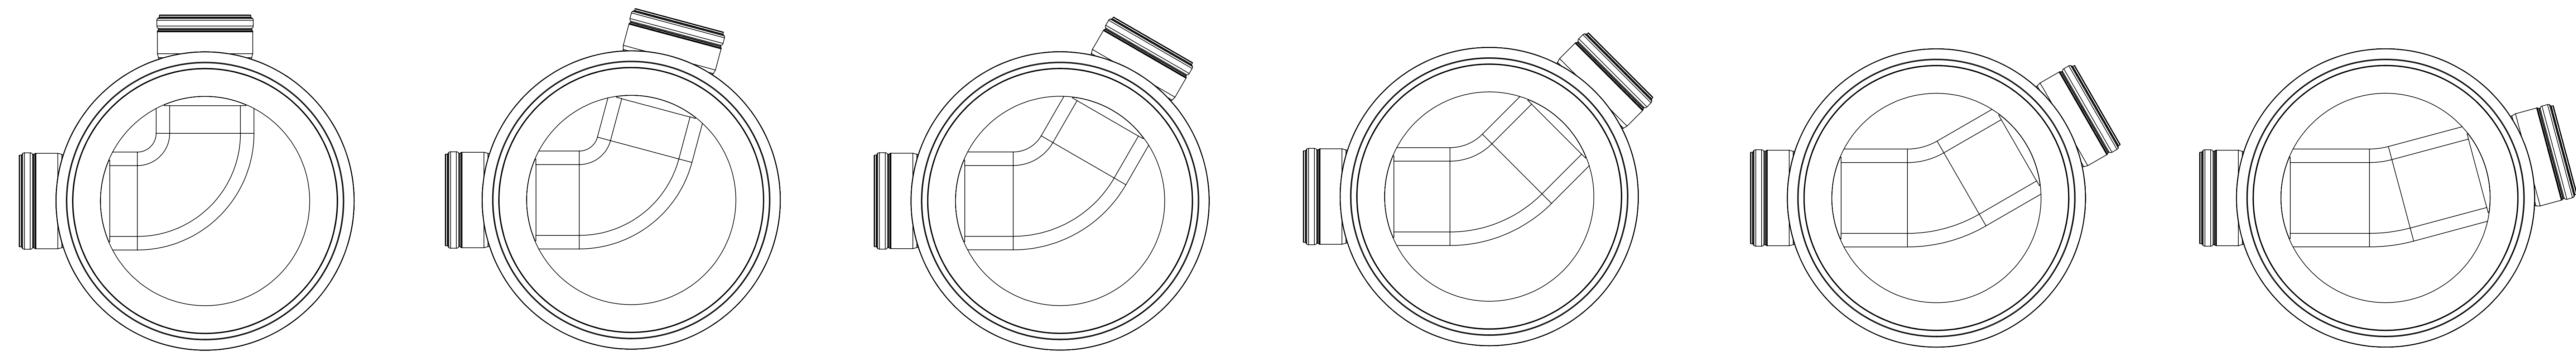

90° ±7.5°


105° ±7.5°

120° ±7.5°

135° ±7.5°

150° ±7.5°

165° ±7.5°

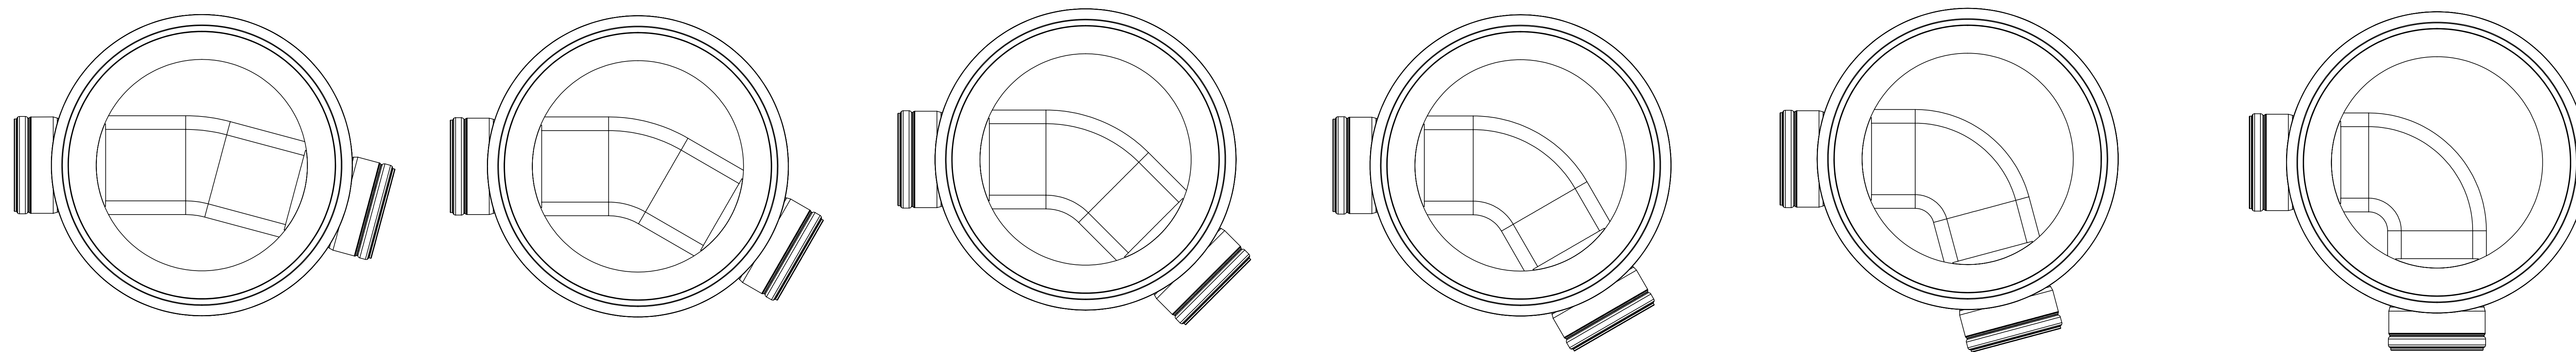

195° ±7.5°


210° ±7.5°

225° ±7.5°

240° ±7.5°

255° ±7.5°

270° ±7.5°

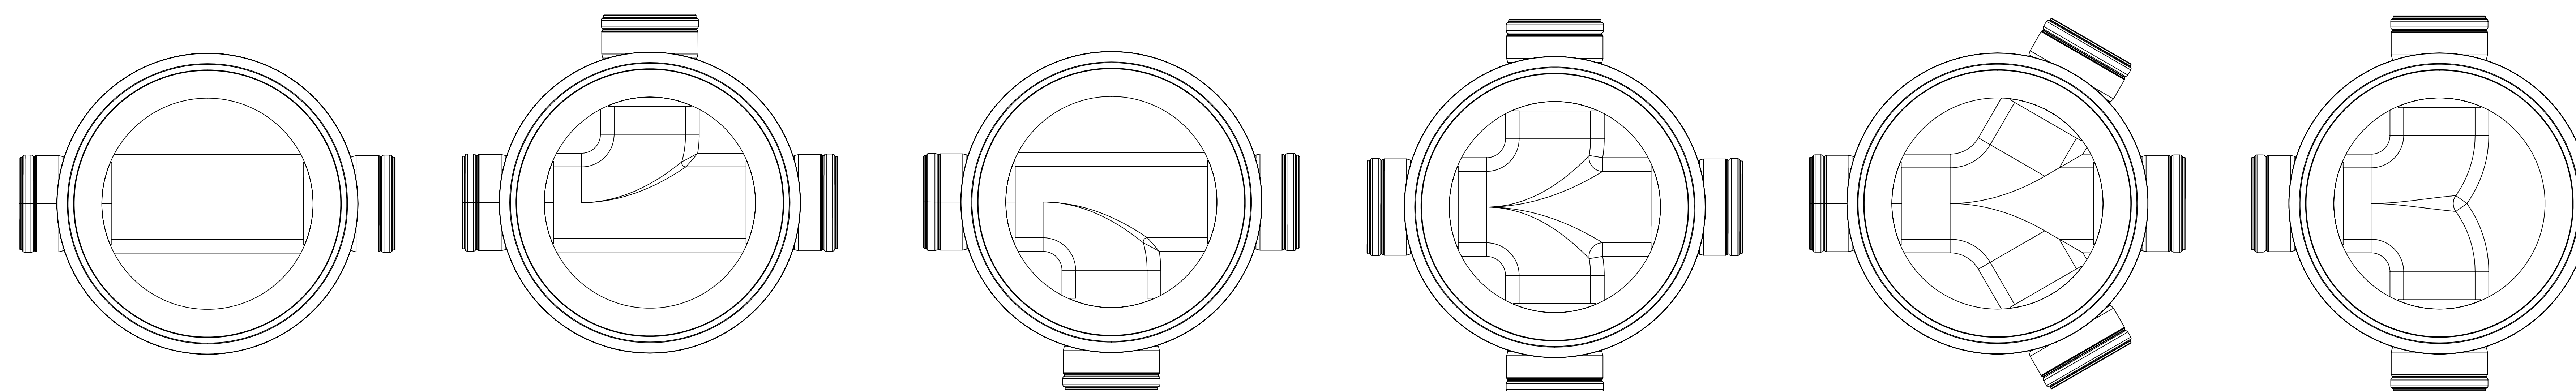

180° ±7.5°

90° & 180°
±3.75° per socket


180° & 270°
±3.75° per socket

90°, 180°, & 270°
±3.75° per socket


60°, 180°, & 240°
±3.75° per socket

90° & 270°
±3.75° per socket


ROMOLD DN1000 PP Pre-Benched Bases - Stock - DN300 inlet and outlet
All sockets have ±3.75° angular tolerance, ±6.5% grade tolerance
Inlet configurations outside of this range can be fabricated by AML in New Zealand

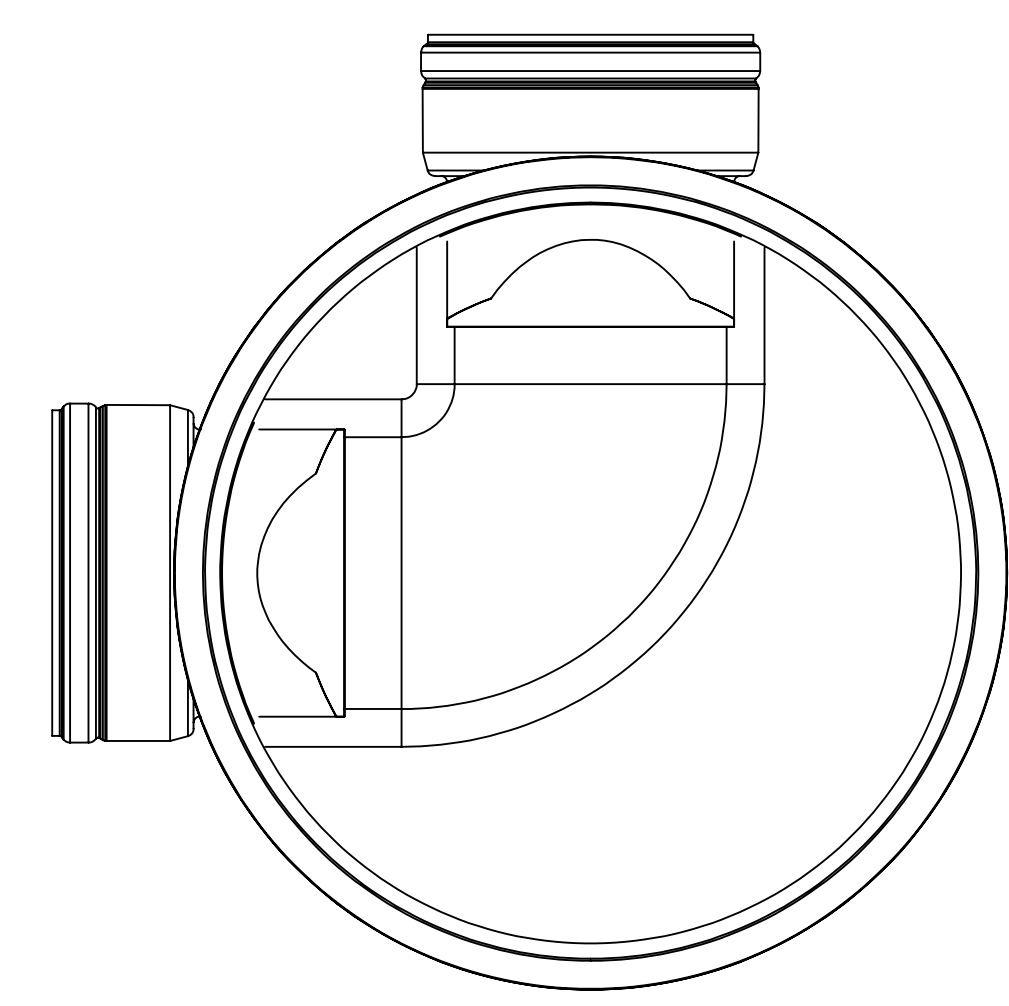


90° ±7.5°

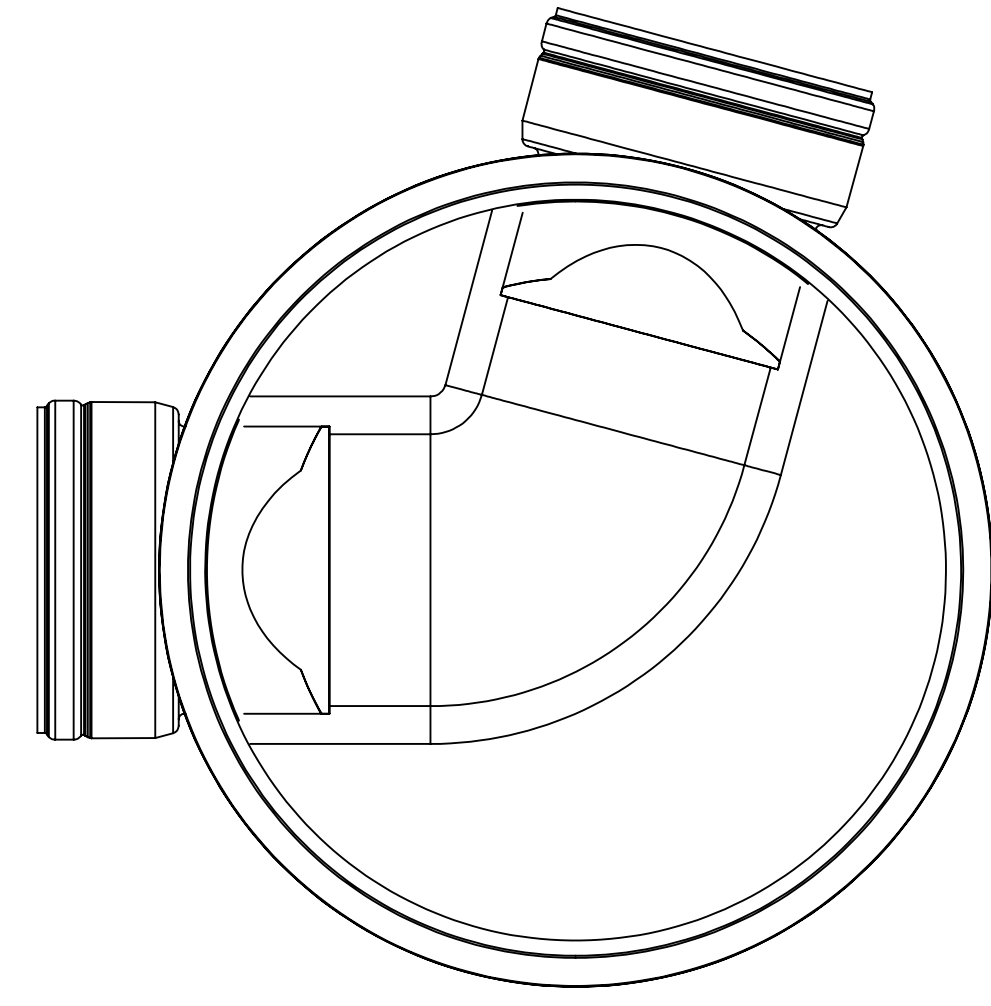


105° ±7.5°

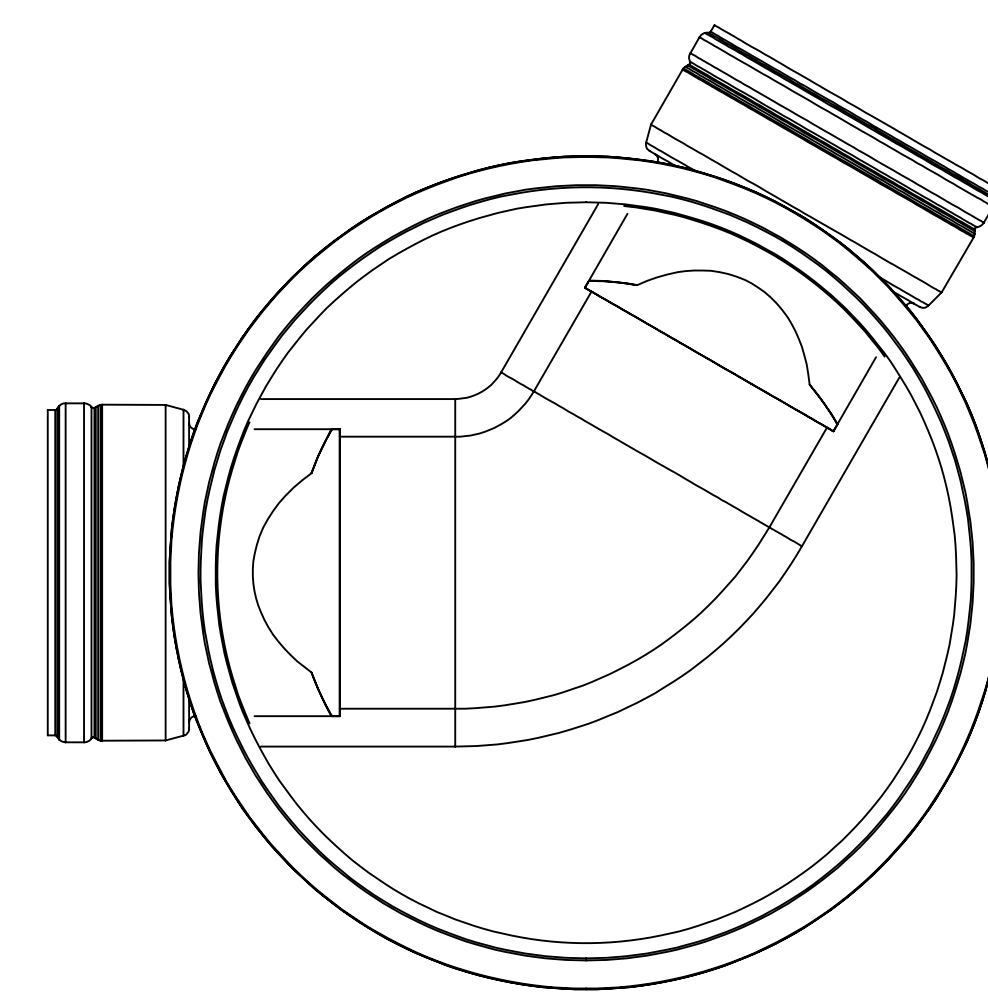


120° ±7.5°

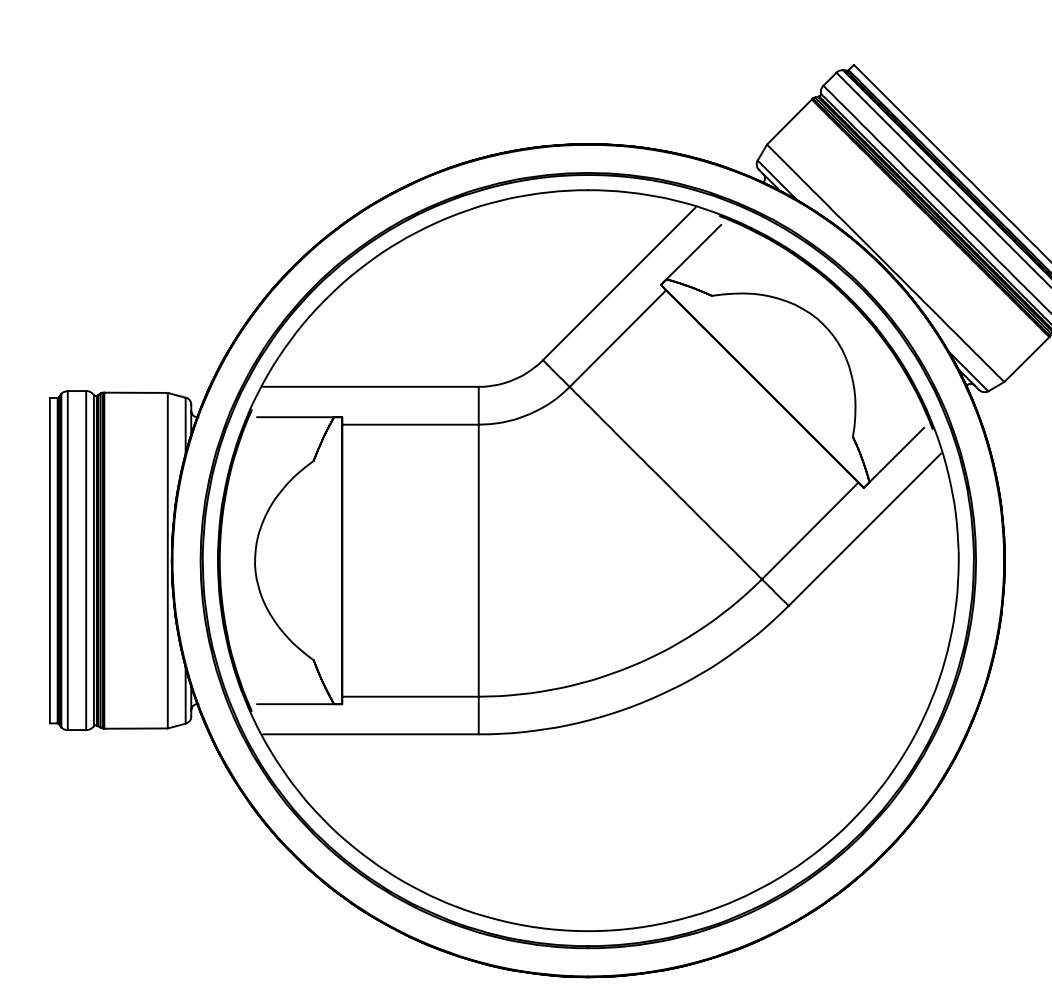


135° ±7.5°

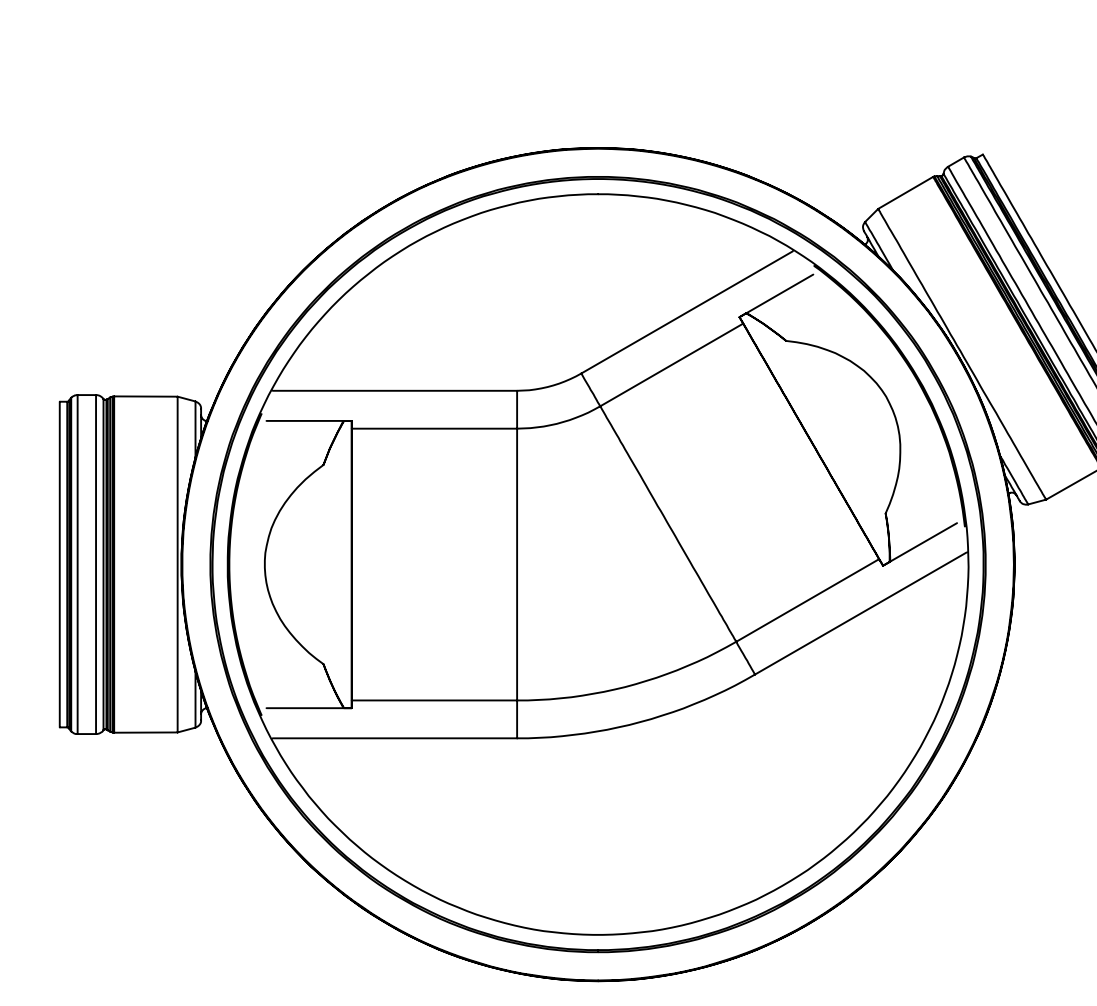


150° ±7.5°

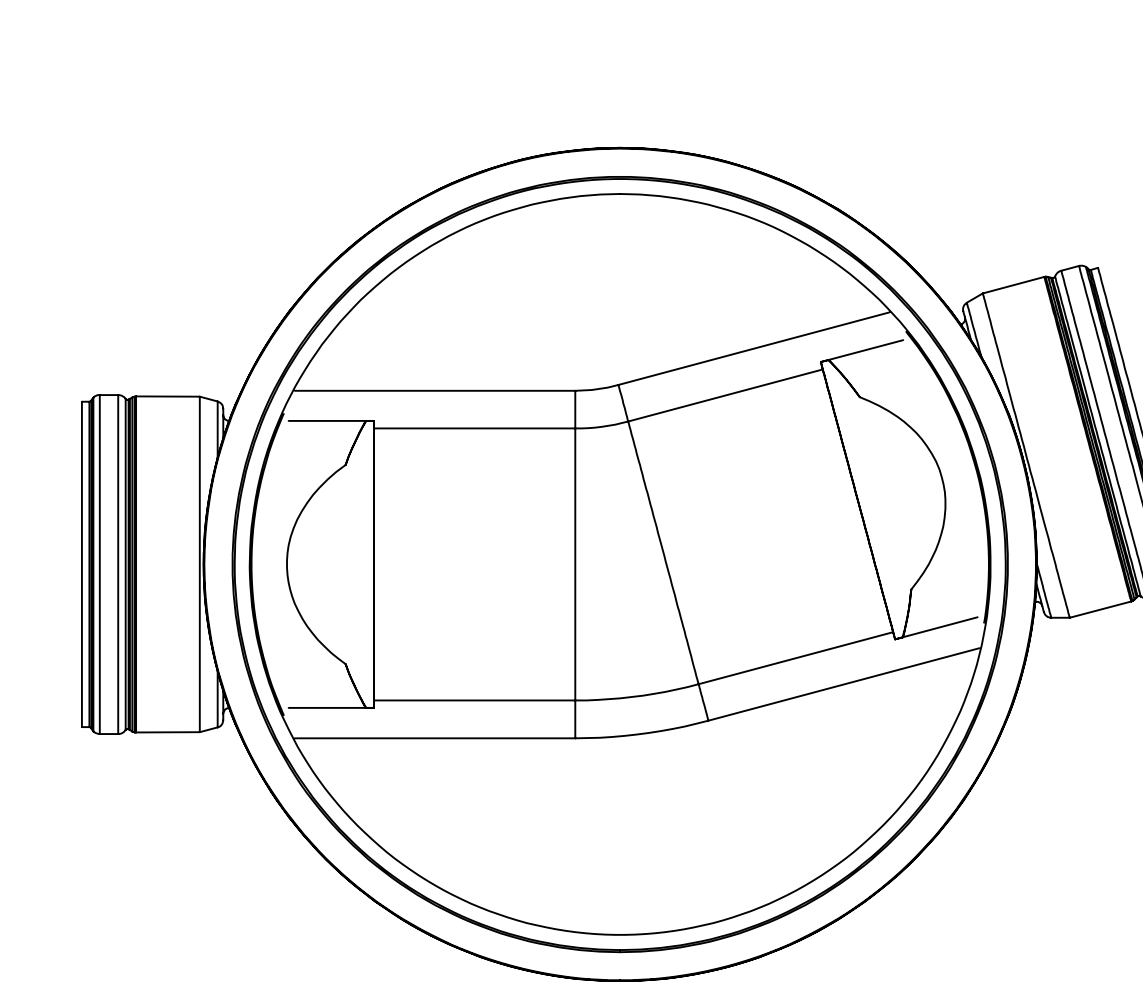


165° ±7.5°

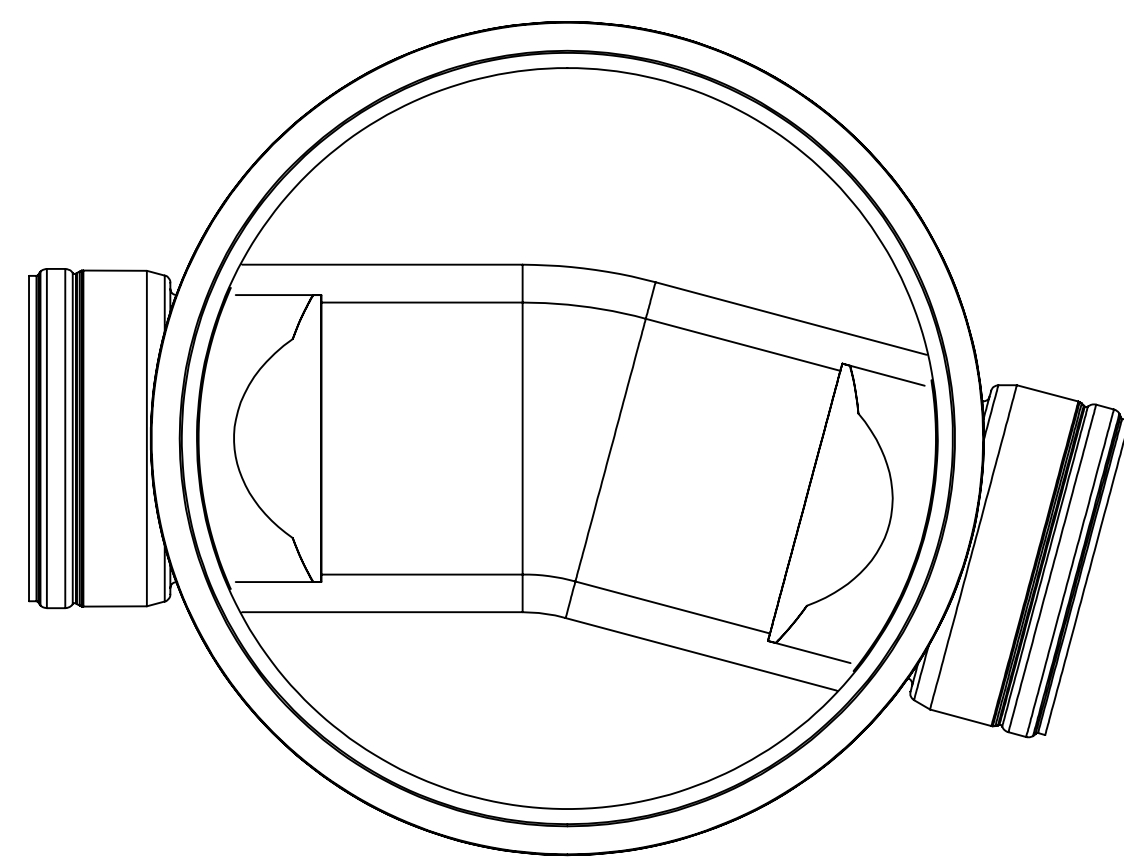


195° ±7.5°

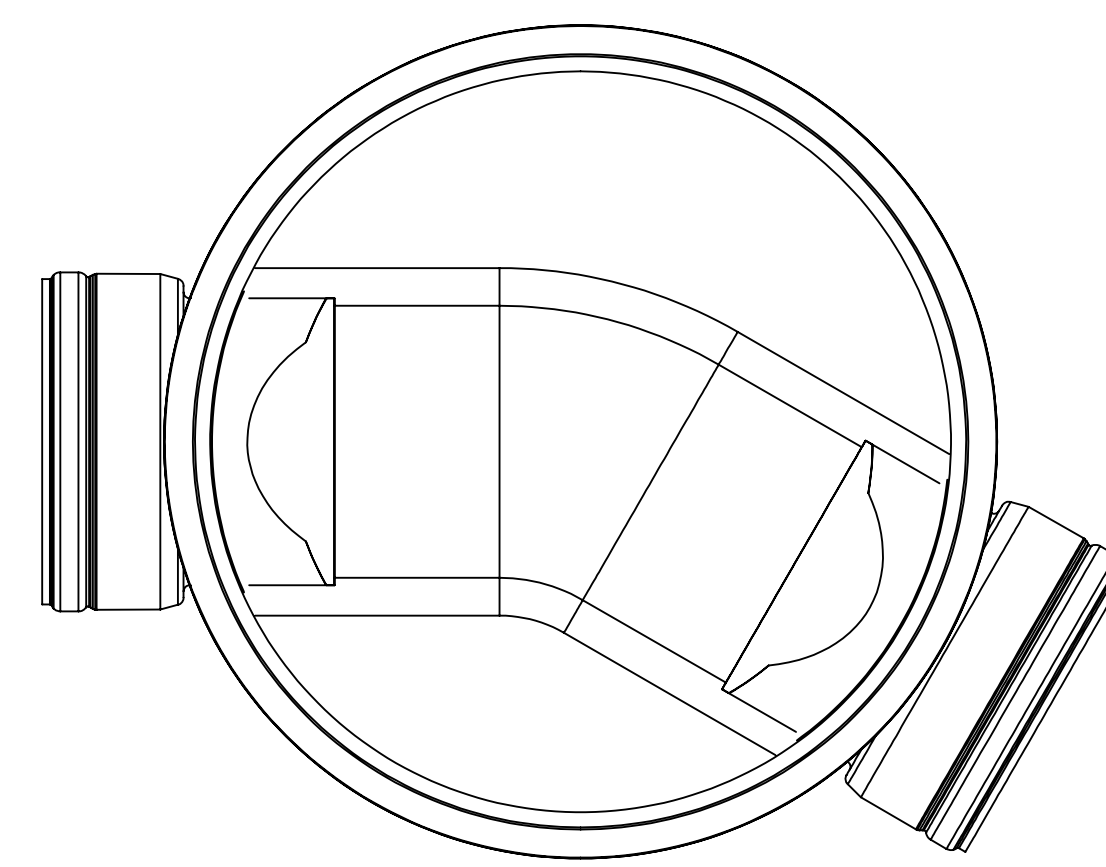


210° ±7.5°

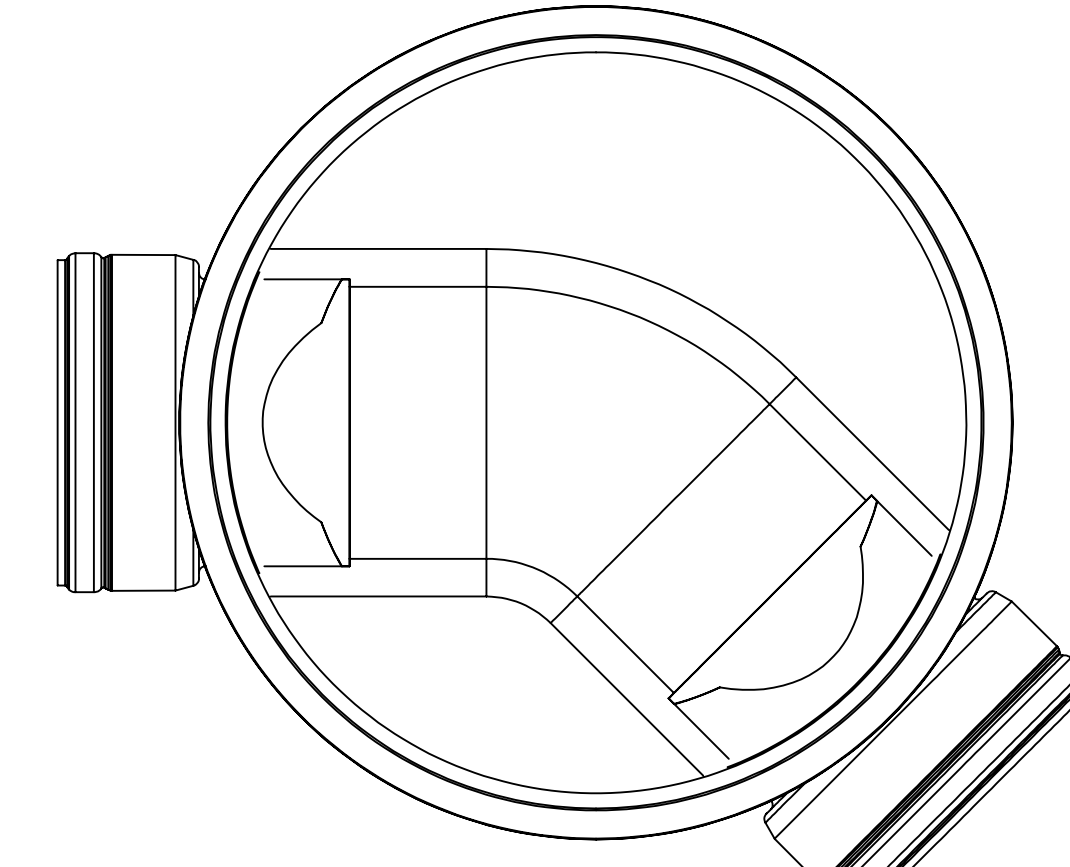


225° ±7.5°

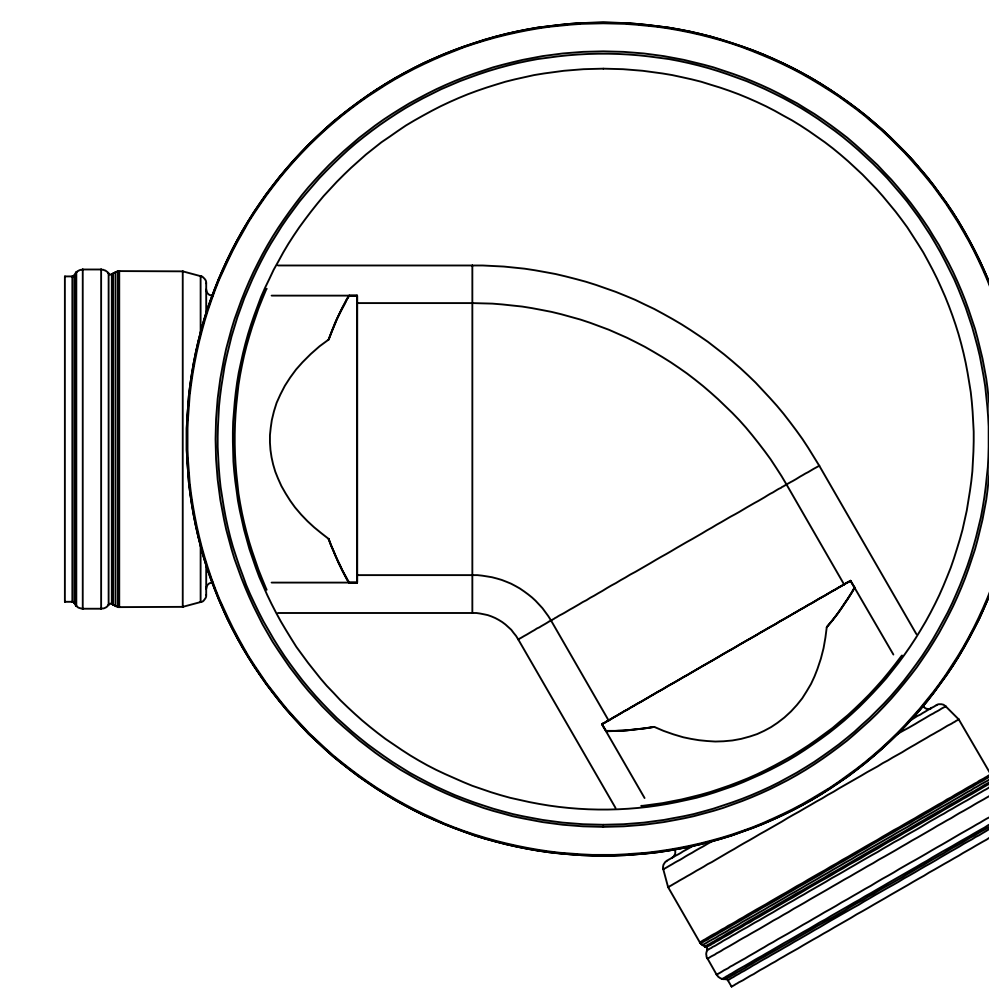


240° ±7.5°

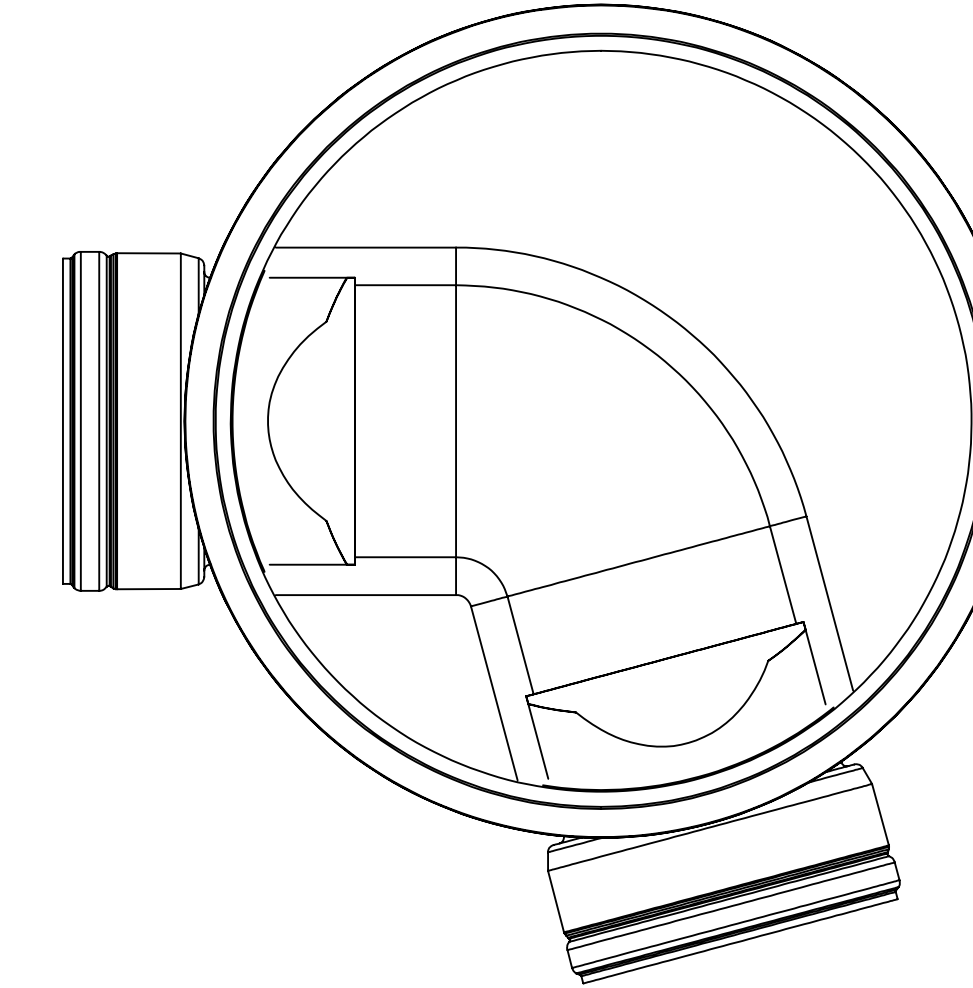

255° ±7.5°

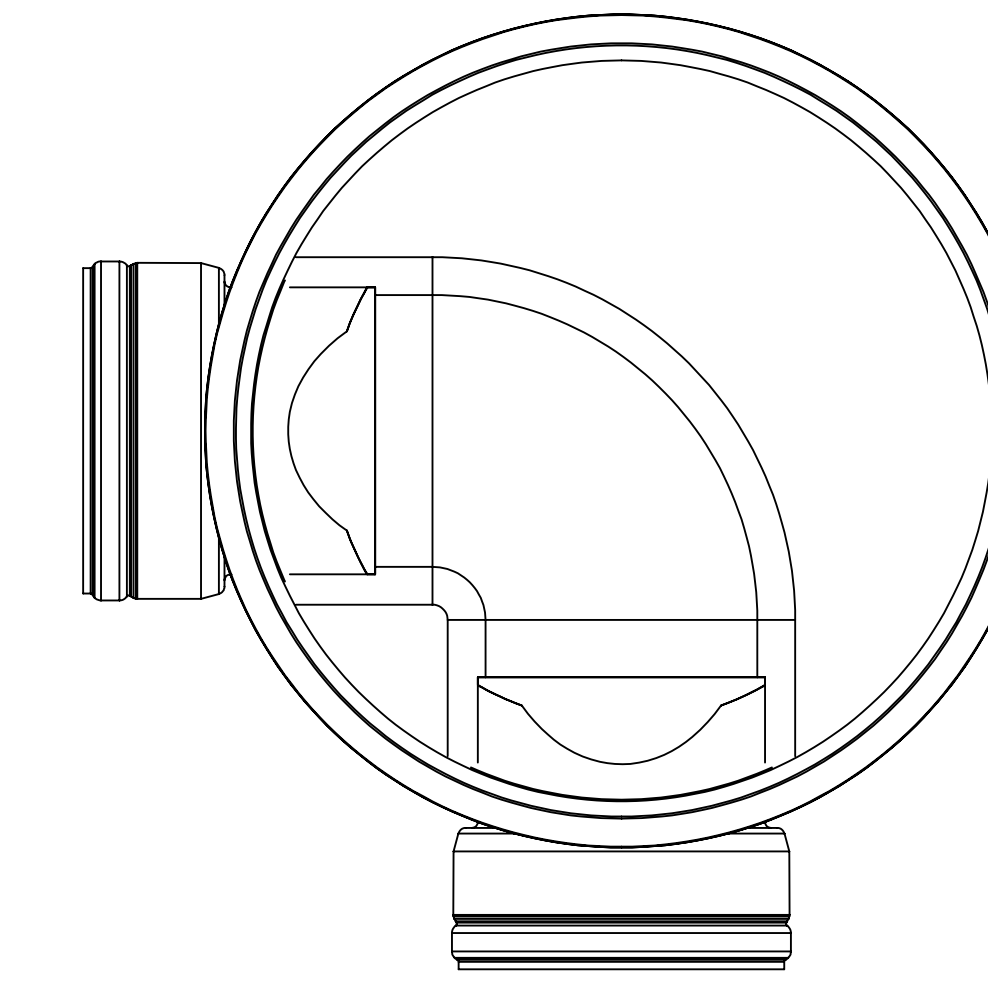

270° ±7.5°

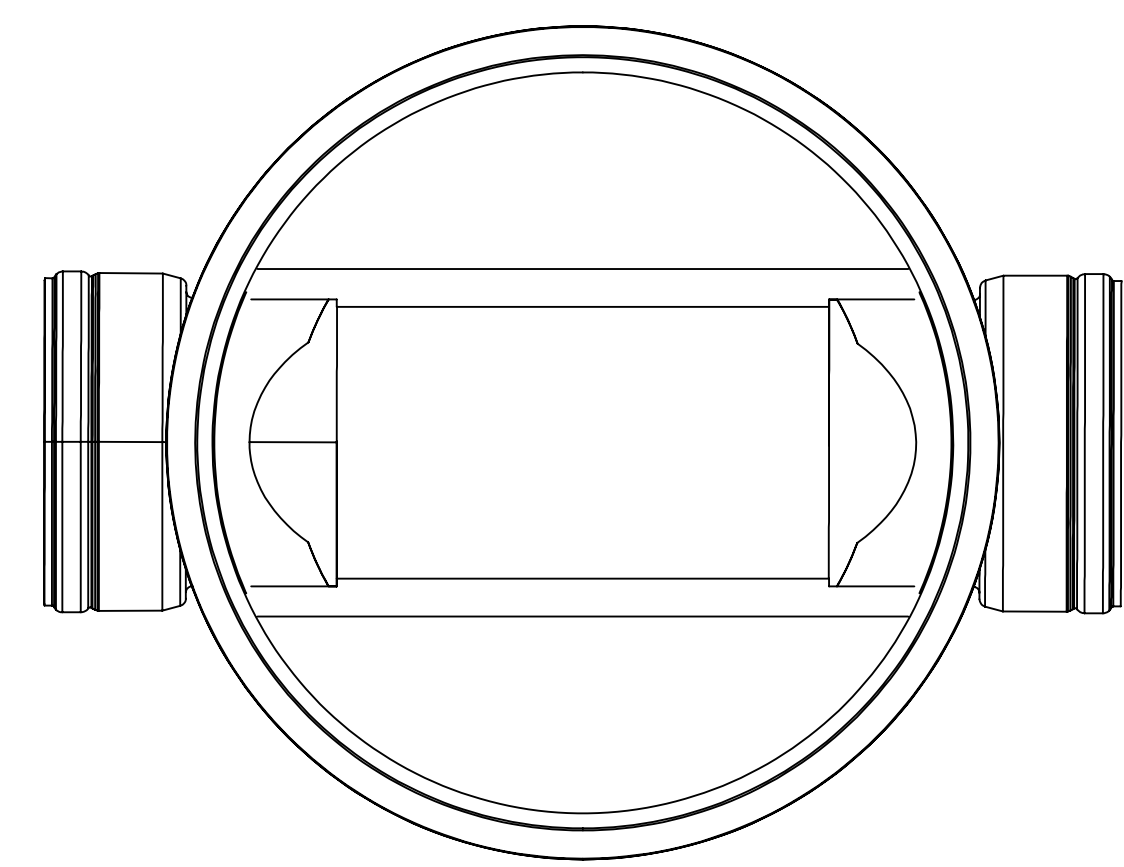

180° ±7.5°

ROMOLD DN1000 PP Pre-Benched Bases - Stock - DN375 inlet and outlet
All sockets have $\pm 3.75^\circ$ angular tolerance, $\pm 6.5\%$ grade tolerance
Inlet configurations outside of this range can be fabricated by AML in New Zealand