


ROMOLD DN1000 Bubble Up Chamber

Manhole chamber for use with an infiltration trench

- Modular design
- Fabricated base
- Outlet RRJ socket
- Ladder included
- Height adjustable to nearest cm
- Approved for traffic loading

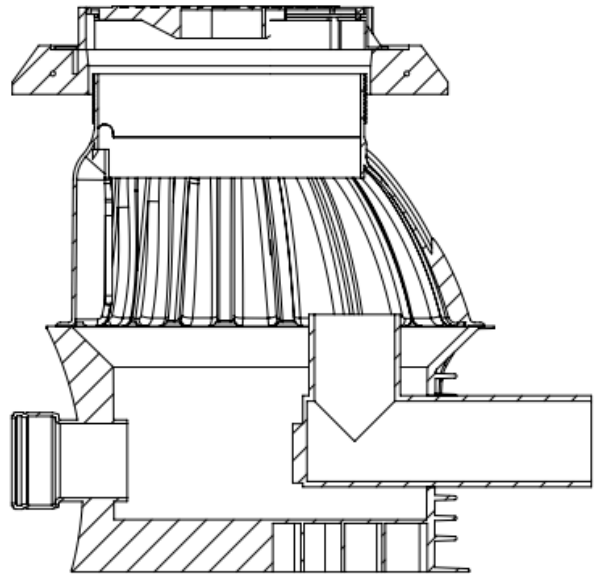

Specifications:

Material:	Polypropylene, injection moulded
Ladder:	Glass filled polypropylene
Diameter:	1000mm
Pipe sizes:	To suit design
Maximum depth:	6m
Maximum groundwater height:	5m
Traffic loading:	Class D (meets HN-HO-72)
Maximum permanent temperature:	60°C
Joints:	EPDM seals between elements SBR seals in sockets
Socket tolerance:	±3.75° per sockets, 6.5% grade
Risers available:	250, 500, 750 & 1000mm
Benching:	Removed for flat bottom
Manhole cover:	DI 600 clear opening, 850mm OD round frame